


VALVOLE DI SCARICO RAPIDO IN OT.58 PER PNEUMATICA

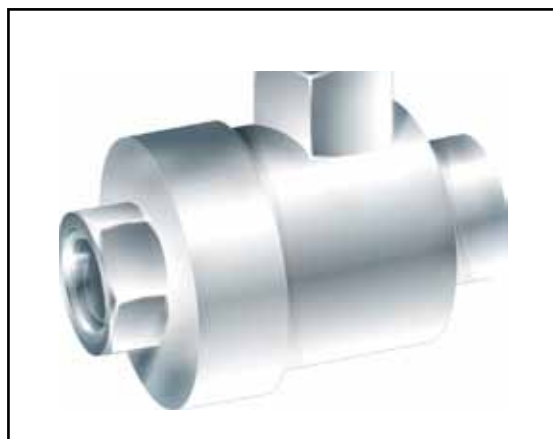

RAPID RELEASE VALVES MADE OF
58 BRASS

VANNES D'ÉVACUATION RAPIDE EN
LAITON 58 POUR INSTALLATIONS
PNEUMATIQUES

PARTICOLARITÀ

PRESSIONE MINIMA: 0,3 BAR
TEMPERATURA: DA -18°C A +70°C

PRESSIONE MASSIMA: 10 BAR
FLUIDI: ARIA COMPRESSA

SPECIAL CHARACTERISTICS

MINIMUM PRESSURE: 0.3 BAR
TEMPERATURE: FROM -18°C TO +70°C

MAXIMUM PRESSURE: 10 BAR
FLUIDS: COMPRESSED AIR

CARACTÉRISTIQUES

PRESSION MINIMALE: 0,3 BAR
TEMPÉRATURE: DE -18°C À +70°C

PRESSION MAXIMALE: 10 BAR
FLUIDES: AIR COMPRIMÉ


ART. 520 VALVOLA DI SCARICO RAPIDO IN OT.58 NICHELATO

CODICE	FIL.	CONF.	EURO	RIFERIMENTO
520/A	1/8"	20	6,41	
520/B	1/4"	10	9,19	
520/D	1/2"	5	16,92	



ART. 521 GUARNIZIONE IN NYLON PER VALVOLA DI SCARICO RAPIDO

CODICE	FIL.	CONF.	EURO	RIFERIMENTO
521/A	1/8"	10	0,16	
521/B	1/4"	10	0,21	
521/D	1/2"	10	0,37	

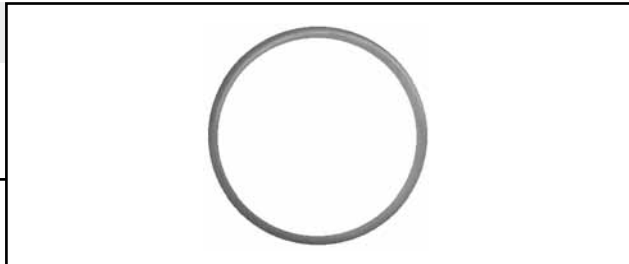

ART. 522 DIAFRAMMA IN POLIURETANO PER VALVOLA DI SCARICO RAPIDO

CODICE	FIL.	CONF.	EURO	RIFERIMENTO
522/A	1/8"	10	1,62	
522/B	1/4"	10	2,34	
522/D	1/2"	10	2,87	

