

-10°C AIR VESSELS

HORIZONTAL GALVANIZED - ALM

MATERIAL

Carbon steel

FLUID CONTENT

Compressed air / Nitrogen (group 2)

FINISHING

GALVANIZED: internal and external hot-dip galvanization

ALM: External Ral 5015 blue paint (standard) and Internal Ral 5005 ALM paint

UPON REQUEST

1" couplings on heads

DIRECTIVE

2014/29/UE

2014/68/UE(PED)

OPERATING PRESSURE


11/16 bar

12/16 bar

OPERATING TEMPERATURE

-10 +120°C

-10 +50°C

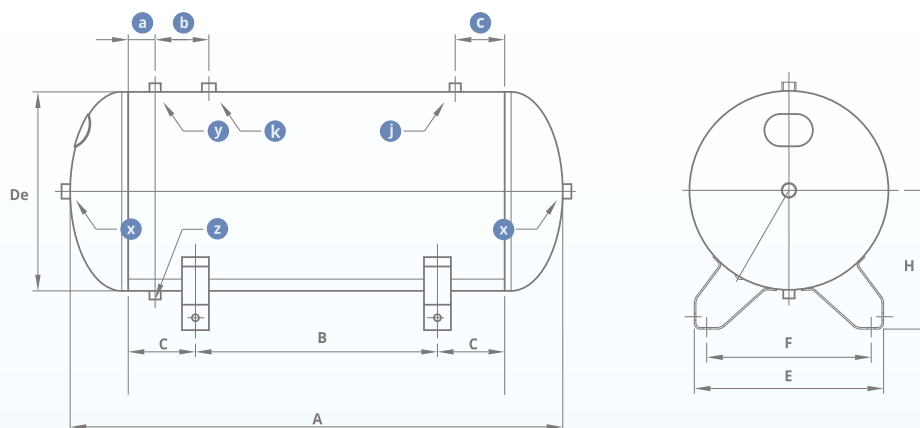

CODE	DIRECTIVE	CAPACITY	OPERATING PRESSURE	De	A	B	C	E	F	H	a	b	c	x	y	k	j	z	WEIGHT
		Lt	Bar	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	inch.	inch.	inch.	inch.	Kg

GALVANIZED

VEC01735	2014/29/UE	270	11	500	1458	800	175	455	402	315	50	130	50	2"	3/8"	1"	1/2"	3/8"	70
VEC00874	2014/29/UE	500	11	600	1858	1204	148	530	470	396	60	155	60	2"	3/8"	1"	1/2"	3/8"	134
VEC0007241	2014/29/UE	720	11	800	1560	700	200	580	470	500	60	155	60	2"	3/8"	1"	1/2"	3/8"	185
VEC02277	2014/68/UE(PED)	1000	12	800	2158	1014	343	605	490	500	100	155	60	2"	3/4"	1"	1/2"	1/2"	215
VEC00690	2014/68/UE(PED)	2000	12	1100	2252	1100	275	800	685	652	200	215	-	2"	1/2"	1/2"	-	1/2"	398
VEC02202	2014/68/UE(PED)	3000	12	1200	2850	1265	227	820	710	698	1230	200	-	2"	1/2"	1/2"	-	1/2"	609

ALM

VEC02317	2014/29/UE	270	11	500	1458	800	175	455	402	315	50	130	50	2"	3/8"	1"	1/2"	3/8"	67
VEC02127	2014/29/UE	500	11	600	1858	1204	148	530	470	396	60	155	60	2"	3/8"	1"	1/2"	3/8"	130
VEC0007355	2014/29/UE	720	11	800	1560	700	200	580	470	500	60	155	60	2"	3/8"	1"	1/2"	3/8"	182
VEC02285	2014/68/UE(PED)	1000	12	800	2158	1014	343	605	490	500	100	155	60	2"	3/4"	1"	1/2"	1/2"	210
VEC02100	2014/68/UE(PED)	2000	12	1100	2252	1100	275	800	685	652	200	215	-	2"	1/2"	1/2"	-	1/2"	394
VEC02284	2014/68/UE(PED)	3000	12	1200	2850	1265	227	820	710	698	1230	200	-	2"	1/2"	1/2"	-	1/2"	605