

-20°C AIR VESSELS

VERTICAL

PAINTED

11 • 12 • 16 bar

MATERIAL

Carbon steel

FLUID CONTENT

Compressed air / Nitrogen / Argon / Helium /
Oil / Oxygen (group 1 hydrogen excluded)

FINISHING

External Ral 5015 blue paint (standard)

UPON REQUEST

Inspection ports

100x150 mm handhole (from 1000 to 3000 lt)

Flanged connections

Horizontal version

DIRECTIVE



OPERATING PRESSURE

OPERATING TEMPERATURE

2014/68/UE(PED) 2014/68/UE(PED)

11/16 bar 12/16 bar

*-20 +50°C -20 +80°C

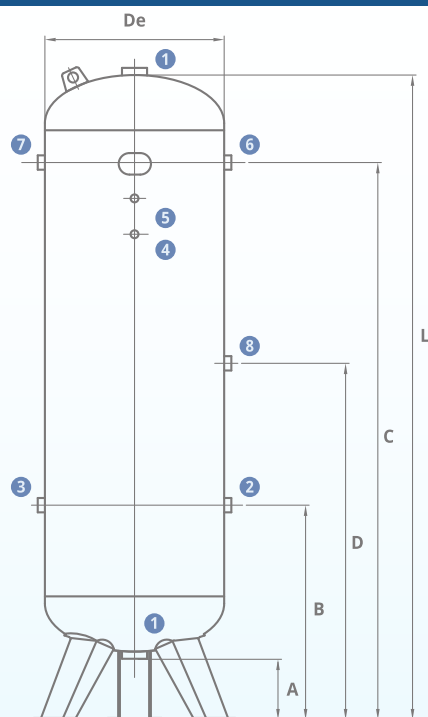

CODE	DIRECTIVE	CAPACITY	OPERATING PRESSURE	De	A	B	C	L	1	2	3	4	5	6	7	WEIGHT
		Lt	Bar	mm	mm	mm	mm	mm	inch.	inch.	inch.	inch.	inch.	inch.	inch.	Kg

RAL 5015*

VEC02287	2014/68/UE(PED)	*500	11	600	155	785	1665	2050	2"	2"	2"	=	3/8"	2"	2"	116
VEC01656	2014/68/UE(PED)	1000	12	800	145	770	1720	2350	2"	2"	2"	3/8"	3/8"	2"	2"	210
VEC01987	2014/68/UE(PED)	1500	12	1000	170	680	1780	2305	2"	2"	2"	1/2"	1/2"	2"	2"	320
VEC01657	2014/68/UE(PED)	2000	12	1100	200	770	1970	2490	2"	2"	2"	1/2"	1/2"	2"	2"	388
VEC01658	2014/68/UE(PED)	3000	12	1200	140	830	2250	2990	2"	2"	2"	1/2"	1/2"	2"	2"	594
VEC02289	2014/68/UE(PED)	*500	16	600	155	785	1665	2050	2"	2"	2"	=	3/8"	2"	2"	145
VEC01918	2014/68/UE(PED)	1000	16	800	145	770	1720	2350	2"	2"	2"	3/8"	3/8"	2"	2"	245
VEC02290	2014/68/UE(PED)	1500	16	1000	170	680	1780	2305	2"	2"	2"	1/2"	1/2"	2"	2"	423
VEC02288	2014/68/UE(PED)	2000	16	1000	170	800	2130	2740	2"	2"	2"	1/2"	1/2"	2"	2"	450
VEC02051	2014/68/UE(PED)	3000	16	1200	140	830	2250	2990	2"	2"	2"	1/2"	1/2"	2"	2"	630