

-20°C AIR VESSELS

VERTICAL FOR OXYGEN PAINTED

MATERIAL

Carbon steel

FLUID CONTENT

Oxygen (group 1 hydrogen excluded)

FINISHING

External Ral 9010 white paint

Internal Ral 5005 ALM paint

UPON REQUEST

Inspection ports

100x150 mm handhole

300x400 mm manhole

Flanged connections

Horizontal version

DIRECTIVE

OPERATING PRESSURE

OPERATING TEMPERATURE


2014/68/UE(PED) 2014/68/UE(PED)

11 bar

12 bar

*-20 +50°C

-20 +80°C

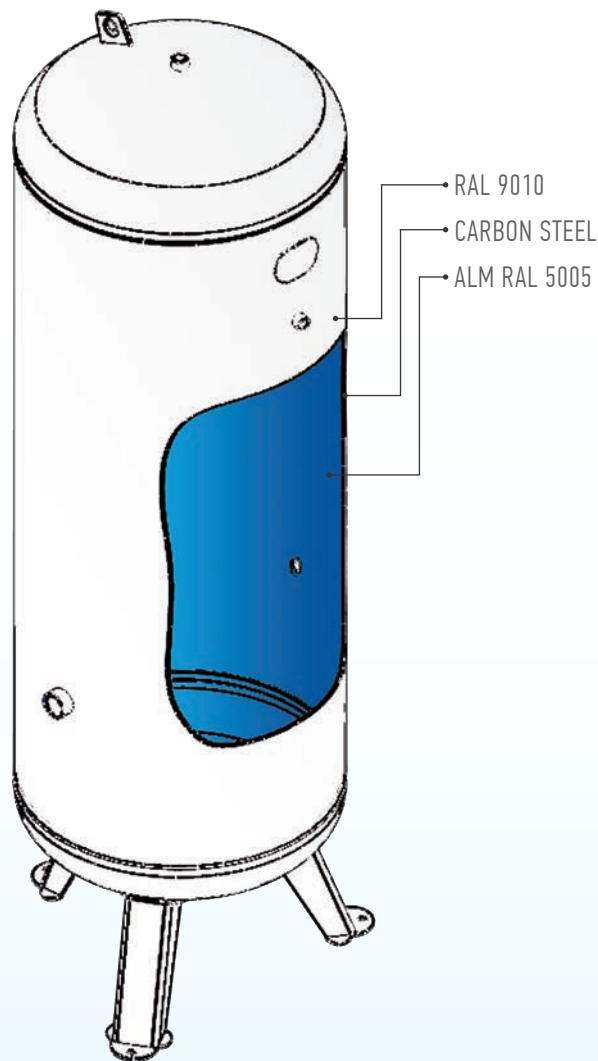

CODE	DIRECTIVE	CAPACITY	OPERATING PRESSURE	De	A	B	C	L	1	2	3	4	5	6	7	WEIGHT
		Lt	Bar	mm	mm	mm	mm	mm	inch.	inch.	inch.	inch.	inch.	inch.	inch.	Kg

RAL 9010 + ALM

VEC02176	2014/68/UE(PED)	* 500	11	600	155	785	1665	2050	2"	2"	2"	=	3/8"	2"	2"	116
VEC03412	2014/68/UE(PED)	800	12	800	145	875	1605	1940	2"	2"	2"	3/8"	3/8"	2"	2"	180
VEC01719	2014/68/UE(PED)	1000	12	800	145	770	1720	2350	2"	2"	2"	3/8"	3/8"	2"	2"	210
VEC01720	2014/68/UE(PED)	1500	12	1000	170	680	1780	2305	2"	2"	2"	1/2"	1/2"	2"	2"	320
VEC01721	2014/68/UE(PED)	2000	12	1100	200	770	1970	2490	2"	2"	2"	1/2"	1/2"	2"	2"	388
VEC01722	2014/68/UE(PED)	3000	12	1200	140	830	2250	2990	2"	2"	2"	1/2"	1/2"	2"	2"	594
VEC01723	2014/68/UE(PED)	4000	12	1450	225	800	2145	2790	2"	3"	3"	3/4"	3/8"	=	3"	835
VEC01724	2014/68/UE(PED)	5000	12	1450	225	800	2745	3390	2"	3"	3"	3/4"	3/8"	=	3"	962