

-20°C AIR VESSELS

VERTICAL OVERSIZE PAINTED

MATERIAL

Carbon steel

FLUID CONTENT

Compressed air / Nitrogen / Argon / Helium /
Oil / Oxygen (group 1 hydrogen excluded)

FINISHING

External Ral 5015 blue paint (standard)

UPON REQUEST

Inspection ports

100x150 mm handhole

300x400 mm manhole

Flanged connections

DIRECTIVE



2014/68/UE(PED)

OPERATING PRESSURE

8/12/16 bar

OPERATING TEMPERATURE

-20 +80°C

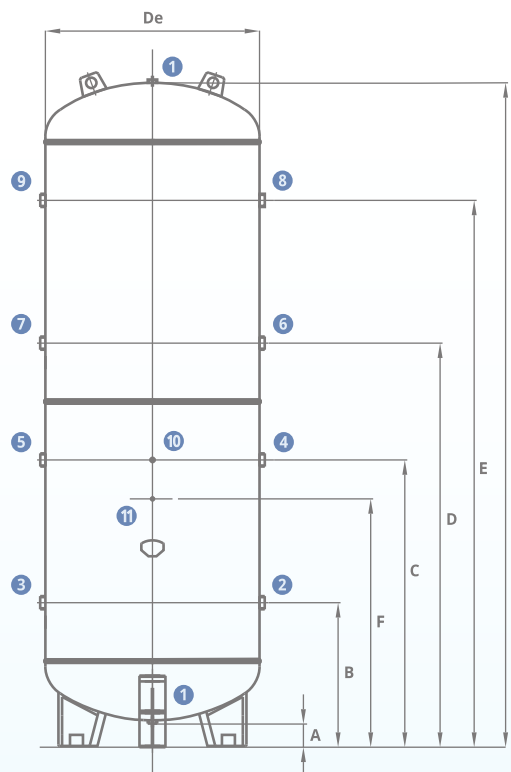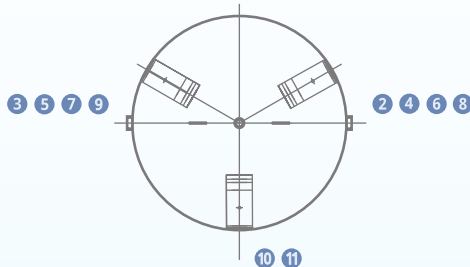

CODE	DIRECTIVE	CAPACITY	OPERATING PRESSURE	DE	A	B	C	D	E	F	L	1	2-3-4-5	6-7-8-9	10	11	WEIGHT
		Lt	Bar	mm	mm	mm	mm	mm	mm	mm	mm	inch.	inch.	inch.	inch.	inch.	Kg

RAL 5015*

VEC02311	2014/68/UE(PED)	5000	8	1650	175	1150	2200	=	=	1950	3118	2"	3"	=	3/4"	3/8"	1120
VEC02280	2014/68/UE(PED)	8000	8	1650	175	1150	1930	2460	3310	1680	4318	2"	3"	3"	3/4"	3/8"	1400
VEC02312	2014/68/UE(PED)	10000	8	1650	175	1150	2200	3150	4250	1950	5118	2"	3"	3"	3/4"	3/8"	1730
VEC01297	2014/68/UE(PED)	4000	12	1450	225	800	2145	=	=	=	2790	2"	3"	=	3/4"	3/8"	835
VEC01298	2014/68/UE(PED)	5000	12	1450	225	800	2745	=	=	=	3390	2"	3"	=	3/4"	3/8"	962
VEC00755	2014/68/UE(PED)	5000	12	1650	175	1150	2200	=	=	1950	3118	2"	3"	=	3/4"	3/8"	1360
VEC01299	2014/68/UE(PED)	6000	12	1450	225	800	3345	=	=	=	3990	2"	3"	=	3/4"	3/8"	1090
VEC01300	2014/68/UE(PED)	8000	12	1650	175	1150	1930	2460	3310	1680	4318	2"	3"	3"	3/4"	3/8"	1730
VEC00815	2014/68/UE(PED)	10000	12	1650	175	1150	2200	3150	4250	1950	5118	2"	3"	3"	3/4"	3/8"	2015
VEC02666	2014/68/UE(PED)	4000	16	1450	225	800	2145	=	=	=	2790	2"	3"	=	3/4"	3/8"	995
VEC02667	2014/68/UE(PED)	5000	16	1450	225	800	2745	=	=	=	3390	2"	3"	=	3/4"	3/8"	1145
VEC02668	2014/68/UE(PED)	6000	16	1450	225	800	3345	=	=	=	3990	2"	3"	=	3/4"	3/8"	1295
VEC01899	2014/68/UE(PED)	10000	16	1650	175	1150	2200	3150	4250	1950	5118	2"	3"	3"	3/4"	3/8"	2585