

-20°C AIR VESSELS

HORIZONTAL OVERSIZE

PAINTED - GALVANIZED - ALM

MATERIAL

Carbon steel

FLUID CONTENT

Compressed air / Nitrogen / Argon / Helium /
Oil / Oxygen (group 1 hydrogen excluded)

FINISHING

RAL 5015: External Ral 5015 blue paint (standard)

GALVANIZED: internal and external hot-dip galvanization

ALM: External Ral 5015 blue paint (standard) and Internal Ral 5005 ALM paint

UPON REQUEST

Inspection ports

100x150 mm handhole

300x400 mm manhole

Flanged connections

DIRECTIVE



2014/68/UE(PED)

OPERATING PRESSURE

12 bar

OPERATING TEMPERATURE

-20 +80°C

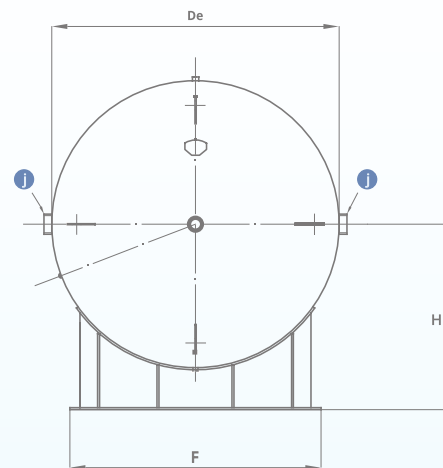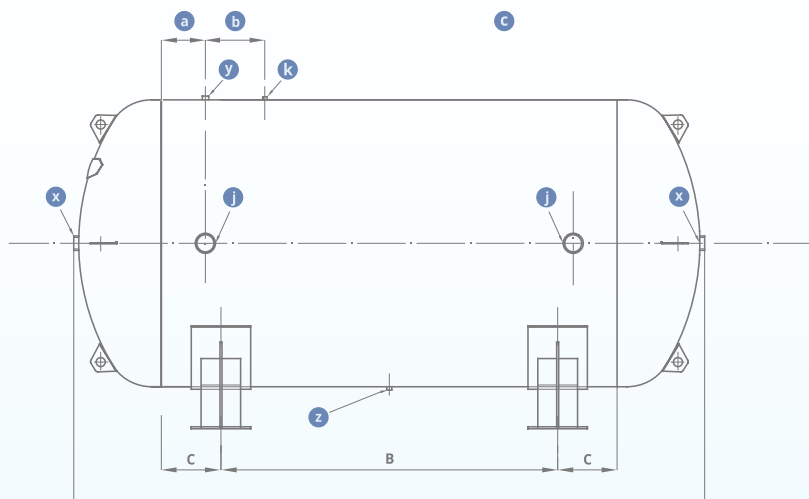

CODE	DIRECTIVE	CAPACITY	OPERATING PRESSURE	De	A	B	C	F	H	a	b	x	y	k	j	z	WEIGHT
		Lt	Bar	mm	mm	mm	mm	mm	mm	mm	mm	inch.	inch.	inch.	inch.	inch.	Kg

RAL 5015*

VEC06212	2014/68/UE(PED)	4000	12	1450	2560	1700	300	1267	937	222	300	2"	3/4"	3/8"	3"	1/2"	890
VEC02410	2014/68/UE(PED)	5000	12	1450	3184	1700	300	1267	937	222	300	2"	3/4"	3/8"	3"	1/2"	1060
VEC00772	2014/68/UE(PED)	5000	12	1650	2962	1300	350	1267	1035	300	450	2"	3/4"	3/8"	3"	1/2"	1380
VEC02323	2014/68/UE(PED)	10000	12	1650	4912	2080	1000	1267	1035	450	300	2"	3/4"	3/8"	3"	2"	2240

GALVANIZED

VEC03850	2014/68/UE(PED)	4000	12	1450	2560	1700	300	1267	937	222	300	2"	3/4"	3/8"	3"	1/2"	930
VEC04698	2014/68/UE(PED)	5000	12	1450	3184	1700	300	1267	937	222	300	2"	3/4"	3/8"	3"	1/2"	1100
VEC04699	2014/68/UE(PED)	5000	12	1650	2962	1300	350	1267	1035	300	450	2"	3/4"	3/8"	3"	1/2"	1410
VEC04701	2014/68/UE(PED)	10000	12	1650	4912	2080	1000	1267	1035	450	300	2"	3/4"	3/8"	3"	2"	2320

ALM

VEC02833	2014/68/UE(PED)	5000	12	1450	3184	1700	300	1267	937	222	300	2"	3/4"	3/8"	3"	1/2"	1060
VEC04700	2014/68/UE(PED)	5000	12	1650	2962	1300	350	1267	1035	300	450	2"	3/4"	3/8"	3"	1/2"	1380