

VERTICAL 21 BAR

PAINTED - GALVANIZED

DIRECTIVE

OPERATING PRESSURE

OPERATING TEMPERATURE

2014/29/UE(PED) 2014/68/UE(PED)

21 bar

21 bar

*-20 +120°C

-20 +100°C

2014/29/UE(PED)

MATERIAL

Carbon steel

FLUID CONTENT

Compressed air/ Nitrogen (group 2)

FINISHING

RAL 5015: External Ral 5015 blue paint (standard)

GALVANIZED: internal and external hot-dip galvanization

UPON REQUEST

ALM version

2014/68/UE(PED)

MATERIAL

Carbon steel

FLUID CONTENT

Compressed air / Nitrogen / Argon / Helium /

Oil / Oxygen (group 1 hydrogen excluded)



FINISHING

RAL 5015: External Ral 5015 blue paint (standard)

GALVANIZED: internal and external hot-dip galvanization

UPON REQUEST

ALM version

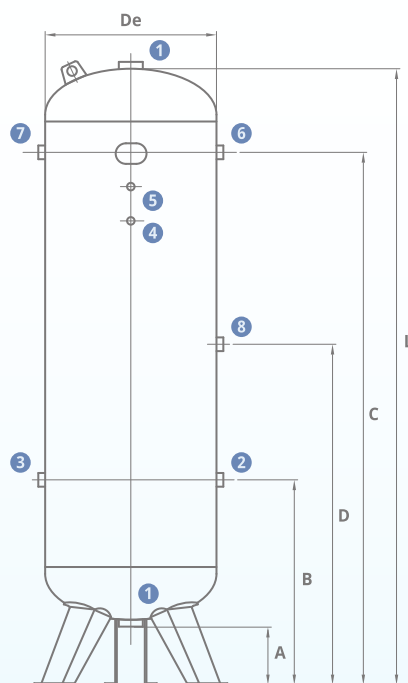

CODE	DIRECTIVE	CAPACITY	OPERATING PRESSURE	De	A	B	C	L	1	2	3	4	5	6	7	WEIGHT
		Lt	Bar	mm	mm	mm	mm	mm	inch.	inch.	inch.	inch.	inch.	inch.	inch.	Kg

RAL 5015*

VEC00883	2014/29/UE	*120	21	396	170	395	1065	1430	2"	3/4"	3/4"	1/4"	3/4"	3/4"	=	58
VEC02407	2014/29/UE	*270	21	500	170	600	1305	1790	2"	1"	1"	=	1"	=	=	108
VEC01470	2014/29/UE	*475	21	600	155	785	1665	2055	2"	2"	2"	=	3/8"	2"	2"	220
VEC02275	2014/68/UE(PED)	1000	21	800	145	770	1720	2350	2"	2"	2"	3/8"	3/8"	2"	2"	352
VEC04155	2014/68/UE(PED)	3000	21	1200	140	830	2250	2990	2"	2"	2"	1/2"	1/2"	2"	2"	1250

GALVANIZED

VEC02438	2009/105/EC	*120	21	396	300	505	1175	1362	2"	3/4"	3/4"	1/4"	3/4"	3/4"	=	58
VEC02433	2009/105/EC	*270	21	500	170	600	1305	1790	2"	1"	1"	=	1"	=	=	110
VEC02434	2009/105/EC	*475	21	600	155	785	1665	2050	2"	2"	2"	=	3/8"	2"	2"	224
VEC02439	2014/68/UE(PED)	1000	21	800	145	770	1720	2350	2"	2"	2"	3/8"	3/8"	2"	2"	352
VEC04156	2014/68/UE(PED)	3000	21	1200	140	830	2250	2990	2"	2"	2"	1/2"	1/2"	2"	2"	1250