MA DIN 43650-A ISO 4400

Descrizione

Custodia:	Nero-grigio (con lente su versione luminosa)
Contatti:	a saldare
Numero poli:	2 + ⏚
Distanza contatti:	18 mm
Cavo standard:	PVC H05VVF (cod. A05 pag 8-1)
Lunghezza cavo:	3 & 5 mt (altre misure su richiesta)
Guarnizione:	NBR profilo (altre su richiesta)
Vite di fissaggio:	M3 x 28
Posizione terra:	H 6/12 (doppia ponticellata)
Grado di protezione:	IP 67 (connesso)
Sezione max. dei conduttori:	1,5 mm²

Circuiti standard (senza LED): 00 - D1 - V1 - T1 - R1
Circuiti standard (con LED): L3 - D5 - V5 - T5 - R5
Colore LED : giallo
Imballo: scatola da 100 pz. con vite e guarnizione

MA DIN 43650-A ISO 4400

Description

Housing:	Black-grey (with protective lens on LED version)
Contacts:	soldered
Number of poles:	2 + ⏚
Contact spacing:	18 mm
Standard cable:	PVC H05VVF (cod. A05 pag. 8-1)
Cable length:	3 & 5 mt (other lengths on request)
Gasket:	NBR profile (other types on request)
Fixing screw:	M3 x 28
Earth position :	H 6/12 (bridged contacts)
Protection class:	IP 67 (mated)
Max. conductor section:	1,5 mm²

Standard circuits (without LED): 00 - D1 - V1 - T1 - R1
Standard circuits (with LED) : L3 - D5 - V5 - T5 - R5
LED colour : amber
Packing unit: box of 100 pcs. with gasket and screw

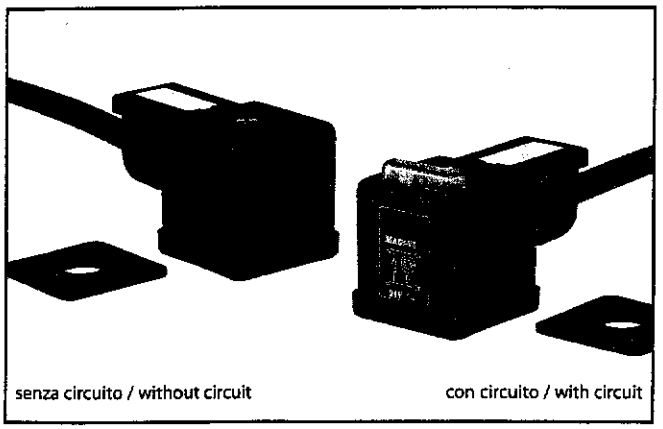

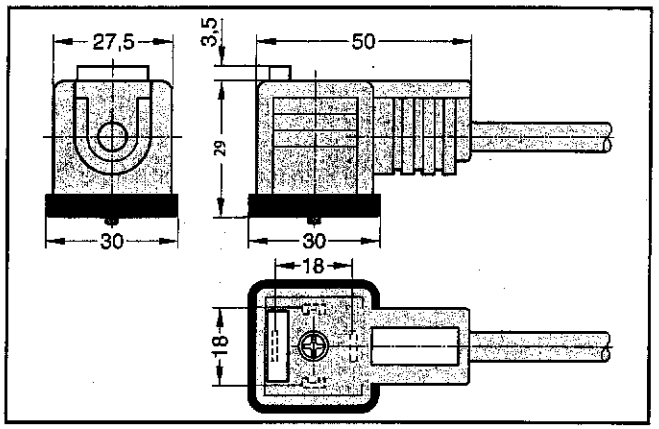

Configurazione standard circuito 00 - Preferred options with circuit 00:

Lunghezza cavo Cable length	2 + ⏚ Terra doppia Double earth
1,0 m	MA131000BA05100
3,0 m	MA131000BA05300
5,0 m	MA131000BA05500

Configurazioni standard con altri circuiti / Preferred options with other circuits

Lunghezza cavo Cable length	Tensione Voltage	V5	T5	R5
3,0 m	24 V	MA631V54BA05300	MA631T54BA05300	MA631R54BA05300
	115 V	MA631V55BA05300	MA631T55BA05300	MA631R55BA05300
	230 V	MA631V56BA05300		MA631R56BA05300
5,0 m	24V	MA631V54BA05500	MA631T54BA05500	MA631R54BA05500
	115V	MA631V55BA05500	MA631T55BA05500	MA631R55BA05500
	230V	MA631V56BA05500		MA631R56BA05500