## KC DIN 43650-C

### Descrizione

| | |
|---|---|
| Custodia: | nero - grigio - trasparente |
| Contatti: | a vite con protezione per conduttori |
| Numero poli: | 2 oppure 3 + ⏚ |
| Distanza contatti: | 8 mm |
| Attacco cavo: | PG7 |
| Guarnizione: | NBR piatta ( altre su richiesta ) |
| Vite di fissaggio: | M2,5 x 28 |
| Posizione terra: | H 6 ( stessa dell'uscita cavo ) |
| Grado di protezione: | IP 65 ( connesso ) |
| Sezione max. dei conduttori: | 0,75 mm² |

| | |
|---|---|
| Circuiti standard ( custodia nero-grigio ): | 00 - D1 - V1 |
| Circuiti standard ( custodia trasp.): | L3 - D5 - V5 |
| Colore LED ( custodia trasparente ): | giallo |
| Imballo: | scatola da 200 pz.con vite e guarnizione |

## KC DIN 43650-C

### Description

| | |
|---|---|
| Housing: | black - grey - transparent |
| Contacts: | screw with conductor protection |
| Number of poles: | 2 or 3 + ⏚ |
| Contact spacing: | 8 mm |
| Cable entry: | PG7 |
| Gasket: | NBR flat ( other types on request ) |
| Fixing screw: | M2,5 x 28 |
| Earth position: | H 6 ( next to cable entry ) |
| Protection class: | IP 65 ( mated ) |
| Max. conductor section: | 0,75 mm² |

| | |
|---|---|
| Standard circuits (housing black-grey ): | 00 - D1 - V1 |
| Standard circuits (transparent housing ): | L3 - D5 - V5 |
| LED colour ( transparent housing ): | amber |
| Packing unit: | box of 200 pcs. with gasket and screw |

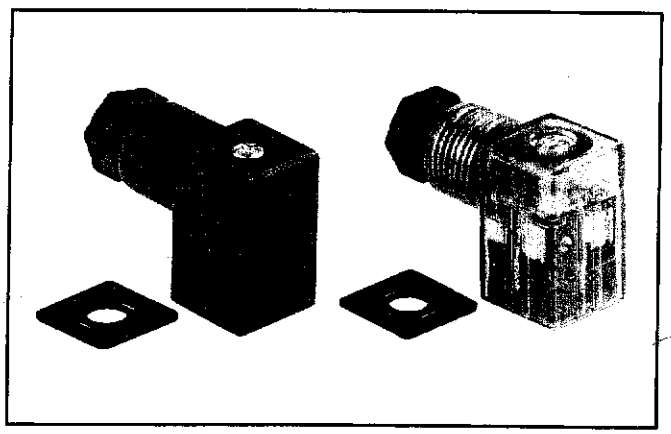

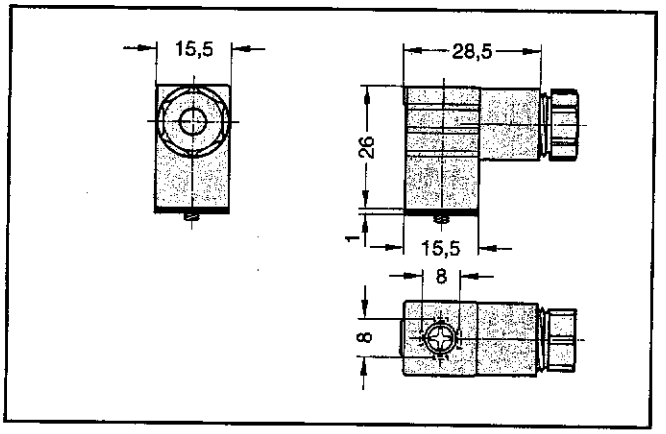


### Configurazione standard circuito 00 / Preferred options with circuit 00:

| Contatti Contacts | Custodia nera Black housing | Custodia grigia Grey housing |
|---|---|---|
| 2 + ⏚ | KC136000B7 | KC136000A7 |
| 3 + ⏚ | KC046000B7 | KC046000A7 |

### Configurazioni standard con altri circuiti / Preferred options with other circuits

| Contatti Contacts | Tensione Voltage | L3 | V5 | D5 |
|---|---|---|---|---|
| 2 + ⏚ | 24 V | KC136L34T7 | KC136V54T7 | KC136D54T7 |
| | 115 V | KC136L35T7 | KC136V55T7 | |
| | 230 V | KC136L36T7 | KC136V56T7 | |