
TD15A & TD15B

Timer Controlled Solenoid valves

STERLING separation ltd



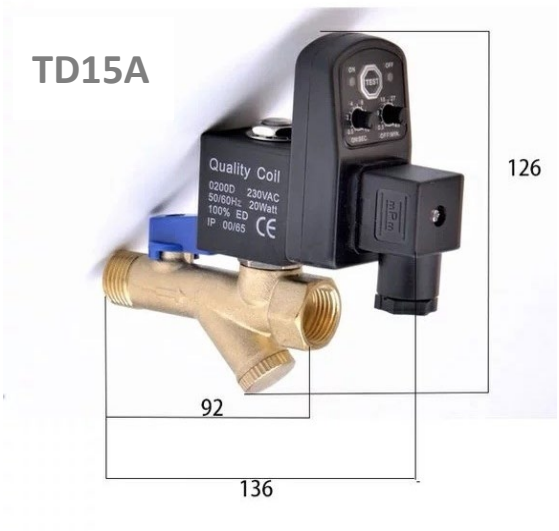

Installation:

These drains may be installed in any orientation; however, the timer and coil should be positioned above any possible water leakage point. STERLING always recommends the use of a strainer to protect any type of drain valve.

Timer			Solenoid Valve	
Interval Timer (off)	0.5 to 45 minutes		Type	2/2-way Direct
Interval Timer (on)	0.5 to 10 seconds		Connection	G1/2”
Voltage	24-240V AC/DC		Working Pressure	0-16bar
Power	22VA		Media Temperature	<80C
Operating Temperature	-10C to +60C		Orifice	3mm
Protection Grade	IP65		Valve Material	Brass
Material	ABS		Insulation Grade	Hgrade
Electrical connection	DIN43650A		Protection Grade	IP65
Indicator light	LED		Voltage tolerance	+/- 10%

bcas Member

STERLING Separation Ltd, 24 Longford Ind Est, Longford Rd, Cannock, Staffs, WS11 0DG
Tel: 01543 502010 email: sales@sterlingsep.com www.sterlingsep.com