


Abluftdrossel mit Schalldämpfer

Flow regulator Type B for cylinders with silencer
Regolatore di flusso con silenziatore

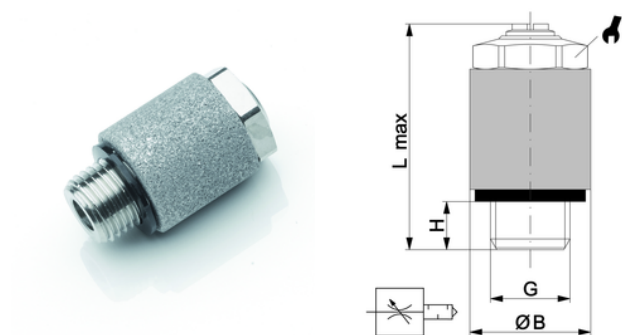

ITV	G	H	L max.	ØB		dB	NI/min
B303331	M5	2,5	16,5	9	8	76	200
B303332	G1/8	5,5	31,5	16	13	76	800
B303333	G1/4	8	37,5	20	17	77	1660
B303334	G3/8	8	45	25	19	80	3240
B303335	G1/2	10	52	30	24	87	4750

Drossel:	Messing vernickelt
Flow regulator:	brass nickel plated
Regolatore di flusso:	ottone
Schalldämpfer:	Edelstahl
Silencer:	stainless steel
Silenziatore:	inox
Dichtung:	PVC
Seal:	PVC
Guarnizioni:	PVC
Betriebsdruck:	max. 10 bar
Working pressure:	max. 10 bar
Pressione di esercizio:	max. 10 bar
Temperatur:	-25°C bis +70°C
Temperature:	-25°C up to +70°C
Temperatura di esercizio:	da -25°C a +70°C
Medium:	geölte und ungeölte Druckluft
Media:	greased and non-greased compressed air
Medium:	per aria compressa sia lubrificata che non

SP

Schalldämpfer
Silencer
Silenziatore a scomparsa



ITV	G	ØB	ØA	L	H
303072	G1/8	6	5	4	3
303073	G1/4	8	8	6,5	3
303074	G3/8	10	9,5	7	4
303075	G1/2	15	12	8	4
303076	G3/4	20	19	8	4
303077	G1	26	23	10	4

Material:	Sinterbronze
Material:	sintered bronze
Materiale:	Bronzo sferico sinterizzato
Filterfeinheit	36µ
Filter mesh:	36µ
Elemento filtrante:	36µ
Betriebsdruck:	max. 10 bar
Working pressure:	max. 10 bar
Pressione di esercizio:	max. 10 bar
Betriebstemperatur:	-10°C bis +80°C
working temperature:	-10°C up to +80°C
Temperatura di esercizio:	da -10°C a +80°C
zyl. Gewinde:	DIN EN ISO 228
cyl. threads:	DIN EN ISO 228
Filettatura	DIN EN ISO 228