




Rectus premium industrial coupling 1/4" according to ISO 6150 B. Suitable for compressed air applications with greater than average air consumption. Coupling system with single-hand operation. Ultra High Flow valve for optimum flow and low pressure drop.

- Available on request:
 - with additional end connections
 - other seals for different temperature ranges and fluids



ISO B Profile

Dust Protections (P. 357)
for Coupling Part.-No. SK23S

KA Single Shut-Off

Working Pressure*:
up to 35 bar

Material:


- Coupling: Nickel plated brass, QPQ treated steel
- Plug: Nickel plated steel or brass
- Seals: NBR

Working Temperature:
-20°C up to +100°C (NBR)


Flow Rate Air:
950 l/min.
inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:
13 l/min.
pressure drop 0.5 bar

* maximum static working pressure with design factor 4 to 1.




Single Shut-Off



Single Shut-Off

1400KAAK Coupler with valve, Male Thread


Nickel-plated brass, Steel QPQ treated, NBR

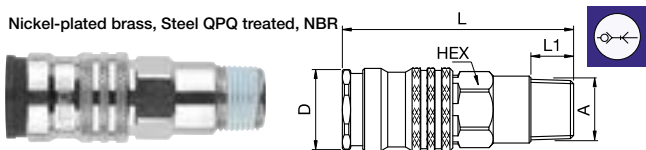

A	HEX	L	L1	D
R1/4 1400KAAK13SPN	19	65	12	23
R3/8 1400KAAK17SPN	19	65	12	23
R1/2 1400KAAK21SPN	22	59.5	17	23

1400KATF Coupler with valve, Hose Barb


Nickel-plated brass, Steel QPQ treated, NBR

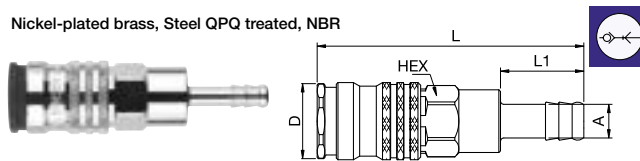


A	HEX	L	L1	D
6 1400KATF06SPN	19	80	25	23
8 1400KATF08SPN	19	80	25	23
9 1400KATF09SPN	19	80	25	23
10 1400KATF10SPN	19	80	25	23
13 1400KATF13SPN	19	80	25	23

1400KAIW Coupler with valve, Female Thread

Nickel-plated brass, Steel QPQ treated, NBR

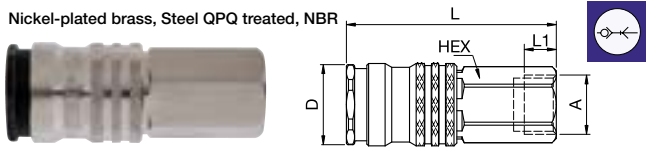


A	HEX	L	L1	D
G1/4 1400KAIW13SPN	19	59	9	23
G3/8 1400KAIW17SPN	19	59	9	23
G1/2 1400KAIW21SPN	24	62	12	23



Single Shut-Off

23SFA Plug without valve, Male Thread


Nickel-plated steel or brass



A			HEX	L	L1	Version
R1/8	23SFAK10SXN		13	39	9	Nickel-plated steel
G1/8	23SAFW10SXN	9087 23 10	14	35	7	Nickel-plated steel
R1/4	23SFAK13SXN		14	42	12	Nickel-plated steel
G1/4	23SAFW13SXN	9087 23 13	14	42	12	Nickel-plated steel
G1/4	23SAFW13MXX		14	42	12	Brass
R3/8	23SFAK17SXN		17	42	12	Nickel-plated steel
G3/8	23SAFW17MXX		17	42	12	Brass
G3/8	23SAFW17SXN	9087 23 17	17	42	12	Nickel-plated steel
R1/2	23SFAK21SXN		22	48	17	Nickel-plated steel
G1/2	23SAFW21SXN	9087 23 21	22	42	12	Nickel-plated steel

23SFIW Plug without valve, Female Thread


Nickel-plated steel



A			HEX	L	L1
G1/8	23SFIW10SXN	9086 23 10	14	36	9
G1/4	23SFIW13SXN	9086 23 13	17	36	9
G3/8	23SFIW17SXN	9086 23 17	19	36	9
G1/2	23SFIW21SXN	9086 23 21	24	39	12

23SFTF Plug without valve, Hose Barb

Nickel-plated steel or brass



A			L	L1	D	Version
6	23SFTF06SXN	9085 23 06	51	25	14	Nickel-plated steel
6	23SFTF06MXX		51	25	14	Brass
8	23SFTF08SXN	9085 23 08	51	25	14	Nickel-plated steel
9	23SFTF09SXN		51	25	14	Nickel-plated steel
9	23SFTF09MXX		51	25	14	Brass
10	23SFTF10SXN	9085 23 10	51	25	14	Nickel-plated steel
13	23SFTF13SXN		51	25	14	Nickel-plated steel