




Universal brass coupling with European standard industrial profile. Coupling system with single-hand operation and standard-valve. Small mass size. The ergonomic sleeve design prevents entering dirt on the valve body. Series 26 in brass material with nickel plating and with additional end connections available on request.



Euro Profile

- Available on request:
 - in brass material with nickel plating
 - with additional end connections
 - other seals for different temperature ranges and fluids

KA Single Shut-Off

Working Pressure*:
up to 35 bar

Material:

- Coupling: Brass
- Plug: Brass
- Seals: NBR

Working Temperature:
-20°C up to +100°C (NBR)

Flow Rate Air:
1.070 l/min.
inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:
18 l/min.
pressure drop 0.5 bar

KB Double Shut-Off

Working Pressure*:
up to 35 bar

Material:


- Coupling: Brass
- Plug: Brass
- Seals: NBR

Working Temperature:
-20°C up to +100°C (NBR)


Flow Rate Air:
950 l/min.
inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:
8.8 l/min.
pressure drop 0.5 bar

* maximum static working pressure with design factor 4 to 1.




Single Shut-Off



Single Shut-Off

26KAA Coupler with valve, Male Thread


Brass, NBR



A	Version	HEX	L	L1	D	Version
G1/8	26KAAW10MPX	22	43	9	25	Brass
G1/8	26KAAW10MPN	9101 26 10	22	43	9	Nickel-plated brass
G1/4	26KAAW13MPX	22	39	9	25	Brass
G1/4	26KAAW13MPN	9101 26 13	22	39	9	Nickel-plated brass
G3/8	26KAAW17MPX	22	41	9	25	Brass
G3/8	26KAAW17MPN	9101 26 17	22	41	9	Nickel-plated brass
G1/2	26KAAW21MPX	22	44	12	25	Brass
G1/2	26KAAW21MPN	9101 26 21	22	44	12	Nickel-plated brass
G1/2	26KAAW21MPXS_36	24	44	12	25	Brass
M14 x 1.5	26KAAD14MPX	22	43	10	25	Brass
M16 x 1.5	26KAAD16MPX	22	43	11	25	Brass
M18 x 1.5	26KAAD18MPX	22	43	11	25	Brass


26KAI Coupler with valve, Female Thread

Brass, NBR



A	Version	HEX	L	L1	D	Version
G1/8	26KAIW10MPX	22	41	8	25	Brass
G1/4	26KAIW13MPX	22	41	9	25	Brass
G1/4	26KAIW13MPN	9114 26 13	22	41	9	Nickel-plated brass
G3/8	26KAIW17MPX	22	41	9	25	Brass
G3/8	26KAIW17MPN	9114 26 17	22	41	9	Nickel-plated brass
G1/2	26KAIW21MPX	24	44	10	25	Brass
G1/2	26KAIW21MPN	9114 26 21	24	44	10	Nickel-plated brass
M14 x 1.5	26KAIM14MPX	22	41	9	25	Brass
M16 x 1.5	26KAIM16MPX	22	41	9	25	Brass
M18 x 1.5	26KAIM18MPX	22	44	9	25	Brass



Series 26 - Brass/Steel



Single Shut-Off

26KAT Coupler with valve, Hose Barb


Brass, NBR



A		HEX	L	L1	D
6	26KATF06MPX	21	58	25	25
8	26KATF08MPX	21	58	25	25
9	26KATF09MPX	21	58	25	25
10	26KATF10MPX	21	58	25	25
13	26KATF13MPX	21	58	25	25
6 Push-Lok	26KATP06MPX	21	58	20.5	25
10 Push-Lok	26KATP10MPX	21	58	24	25
13 Push-Lok	26KATP13MPX	21	58	28	25

26KAKO Coupler with valve, with Plastic Hose Connection



Brass, NBR



A		HEX	G	L	L1	L2	D
4 x 6	26KAKO06MPX	21	M10x1	58	7	6	25
6 x 8	26KAKO08MPX	21	M12x1	45	7	6	25
8 x 10	26KAKO10MPX	21	M16x1	49	9	8	25
9 x 12	26KAKO12MPX	21	M16x1	49	9	8	25

26KATS Coupler with valve, Panel Mount with Hose Barb

Brass, NBR




A		HEX	HEX1	B	G	L	L1	L2	D
6	26KATS06MPX	21	17	4	M12x1	60	17	10	25
10	26KATS10MPX	21	17	4	G1/4	72	25	14	25



Single Shut-Off

26KAKK Coupler with valve, Plastic Hose Connection with Spring Guard


Brass, NBR



A		HEX	G	L	L1	L2	D
4 x 6	26KAKK06MPX	21	M10x1	120	7	6	25
6 x 8	26KAKK08MPX	21	M12x1	132	7	6	25
8 x 10	26KAKK10MPX	21	M16x1	143	9	8	25
9 x 12	26KAKK12MPX	21	M16x1	150	9	8	25

26SFA Plug without valve, Male Thread


Brass



A		HEX	L	L1
G1/8	26SFAW10MXX	14	31	7
G1/4	26SFAW13MXX	17	33	9
G3/8	26SFAW17MXX	19	33	9
G1/2	26SFAW21MXX	24	38	12
M14 x 1.5	26SFAD14MXX	17	35	10
M16 x 1.5	26SFAD16MXX	19	36	11
M18 x 1.5	26SFAD18MXX	22	37	11

26SFI Plug without valve, Female Thread

Brass




A		HEX	L	L1
G1/8	26SFIW10MXX	14	30	7
G1/4	26SFIW13MXX	17	33	10
G3/8	26SFIW17MXX	19	33	10
G1/2	26SFIW21MXX	24	35	12
M14 x 1.5	26SFIM14MXX	17	33	10
M16 x 1.5	26SFIM16MXX	19	33	10



Single Shut-Off

26SFT Plug without valve, Hose Barb


Brass

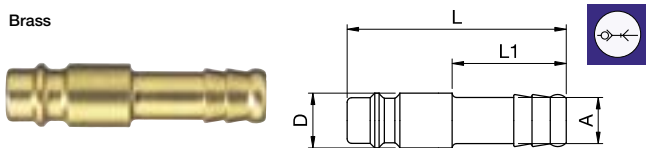

A		L	L1	D
4	26SFTF04MXX	48	25	12
6	26SFTF06MXX	48	25	12
8	26SFTF08MXX	48	25	12
9	26SFTF09MXX	48	25	12
10	26SFTF10MXX	48	25	12
13	26SFTF13MXX	48	25	15
6 Push-Lok	26SFTP06MXX	43	20.5	16
10 Push-Lok	26SFTP10MXX	46	24	22
13 Push-Lok	26SFTP13MXX	50	28	24

26FKO Plug without valve, with Plastic Hose Connection


Brass

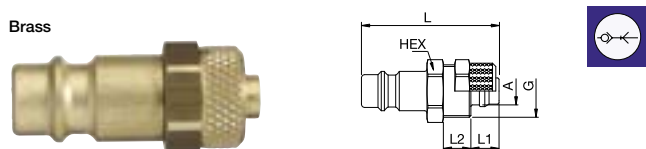


A		HEX	G	L	L1	L2	D
4 x 6	26SFKO06MXX		M10x1	34	7	6	12
6 x 8	26SFKO08MXX		M12x1	34	7	6	12
8 x 10	26SFKO10MXX	17	M16x1	42	9	6	
9 x 12	26SFKO12MXX	17	M16x1	42	9	8	

26SFTS Plug without valve, Panel Mount with Hose Barb

Brass

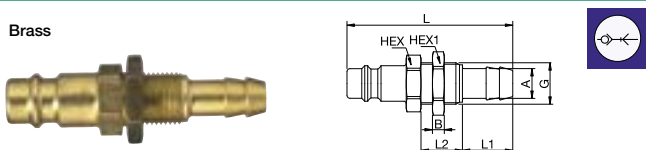


A		HEX	HEX1	B	G	L	L1	L2
10	26SFTS10MXX	17	19	4	M14x1	56	17	14



Single Shut-Off

26SFKK Plug without valve, Plastic Hose Connection with Spring Guard


Brass

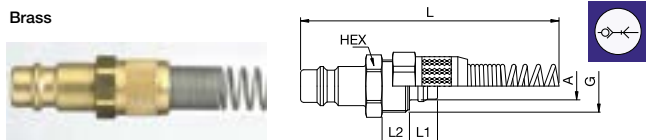

A		HEX	G	L	L1	L2	D
4 x 6	26SFKK06MXX		M10x1	120	7	6	12
6 x 8	26SFKK08MXX		M12x1	127	7	6	12
8 x 10	26SFKK10MXX	17	M16x1	135	9	8	
9 x 12	26SFKK12MXX	17	M16x1	142	9	8	

26SRTF Plug without valve, Recoil Eliminator with Hose Barb

Brass

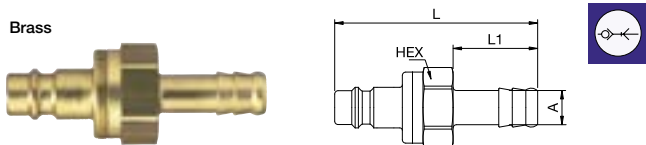


A		HEX	L	L1
6	26SRTF06MXX	21	60	25
8	26SRTF08MXX	21	60	25
9	26SRTF09MXX	21	60	25
10	26SRTF10MXX	21	60	25
13	26SRTF13MXX	21	60	25




Double Shut-off

26KBA Coupler with valve, Male Thread

Brass, NBR

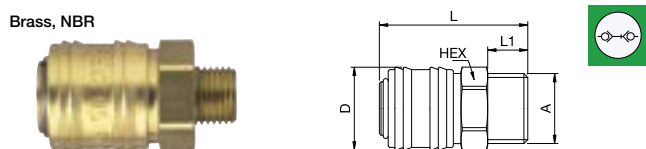


A		HEX	L	L1	D
G1/8	26KBAW10MPX	22	43	9	25
G1/4	26KBAW13MPX	22	39	9	25
G3/8	26KBAW17MPX	22	41	9	25
G1/2	26KBAW21MPX	24	44	10	25
M14 x 1.5	26KBAD14MPX	22	43	10	25
M16 x 1.5	26KBAD16MPX	22	43	11	25
M18 x 1.5	26KBAD18MPX	22	43	11	25



Double Shut-off

26KBI Coupler with valve, Female Thread



Brass, NBR



A		HEX	L	L1	D
G1/8	26KBIW10MPX	22	41	8	25
G1/4	26KBIW13MPX	22	41	9	25
G3/8	26KBIW17MPX	22	41	9	25
G1/2	26KBIW21MPX	24	44	10	25
M14 x 1.5	26KBIW14MPX	22	41	9	25
M16 x 1.5	26KBIW16MPX	22	41	9	25
M18 x 1.5	26KBIW18MPX	22	41	9	25

26KBT Coupler with valve, Hose Barb


Brass, NBR




A		HEX	L	L1	D
6	26KBTf06MPX	21	58	25	25
8	26KBTf08MPX	21	58	25	25
9	26KBTf09MPX	21	58	25	25
10	26KBTf10MPX	21	58	25	25
13	26KBTf13MPX	21	58	25	25
6 Push-Lok	26KBTp06MPX	21	58	20.5	25
10 Push-Lok	26KBTp10MPX	21	58	24	25
13 Push-Lok	26KBTp13MPX	21	58	28	25

26KBK0 Coupler with valve, with Plastic Hose Connection

Brass, NBR





A		HEX	G	L	L1	L2	D
4 x 6	26KBK006MPX	21	M10x1	45	7	6	25
6 x 8	26KBK008MPX	21	M12x1	45	7	6	25
8 x 10	26KBK010MPX	21	M16x1	49	9	8	25
9 x 12	26KBK012MPX	21	M16x1	49	9	8	25



Double Shut-off

26KBTs Coupler with valve, Panel Mount with Hose Barb


Brass, NBR



A		HEX	HEX1	B	G	L	L1	L2	D
6	26KBTs06MPX	21	17	4	M12x1	60	17	10	25
10	26KBTs10MPX	21	17	4	G1/4	72	25	14	25

26KBKK Coupler with valve, Plastic Hose Connection with Spring Guard

Brass, NBR



A		HEX	G	L	L1	L2	D
6 x 8	26KBKK08MPX	21	M12x1	132	7	6	25
8 x 10	26KBKK10MPX	21	M16x1	143	9	8	25
9 x 12	26KBKK12MPX	21	M16x1	150	9	8	25

Plugs for Series 26KB can be found with Series 25, on pages 247.