


SPIRALFLEX HD

SPH Range



Offers quick and simple protection to all types of hydraulic and pneumatic hoses. A cost-effective solution to shocks, abrasion and deterioration, helping reduce equipment downtime and maintenance costs.

Easily deployed to new or existing hydraulic and pneumatic assemblies, without the use of any tools.

Key Features:

- Simple to use with one or several hoses.
- Smooth rounded edges prevent damage to hose assemblies or equipment during installation and use.
- Can withstand a temperature range -40°C to +138°C.
- Suitable for contact with hydraulic fluids including glycol and phosphate based products.

Sizes:

Available in 20m and 50m coils


Colours:

Black, red and yellow

Other colours are available upon request

Packaging:

Supplied boxed for ease of handling.

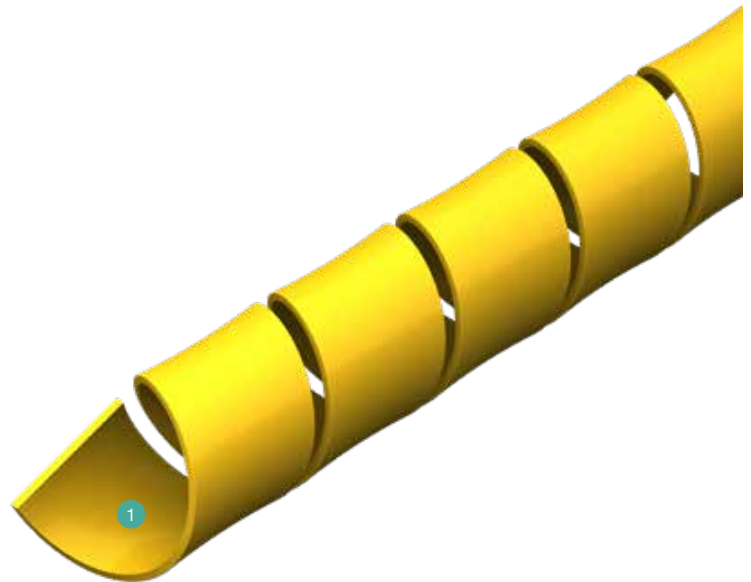


1. High Density Polyethylene (HDPE)



Applications:

- Hydraulic
- Pneumatic
- Paint spray
- Chemical or industrial hoses



Product Ref	Size Range	External Diameter	Wall Thickness	Weight per coil	Coil Length
SPH16/50	11.5-16mm	16mm	1.5mm	2.9 Kg	50m
SPH20/50	14-20mm	20mm	1.8mm	5.1 Kg	50m
SPH25/50	20-25mm	25mm	2.0mm	6.4 Kg	50m
SPH32/50	25-32mm	32mm	2.4mm	11.5 Kg	50m
SPH40/50	32-40mm	40mm	2.4mm	13.4 Kg	50m
SPH50/20	38-50mm	50mm	3.0mm	8.5 Kg	20m
SPH63/20	50-63mm	63mm	3.5mm	12.6 Kg	20m
SPH75/20	60-75mm	75mm	3.8mm	16.3 Kg	20m