

Accessories

M5 - G1"

Serie 600



Quick exhaust valve - M5 - G1/8" - G1/4" - G1/2"

Ordering code

6.02.1


CONNECTION

05 = M5

18 = G 1/8"

14 = G 1/4"

12 = G 1/2"



G	M5	1/8"	1/4"	1/2"
B	22	32	35	52
C	12	20	25	37
D	28	38	50	62
Weight gr.	50	62	112	310
Flow rate NI/min at 6 bar with $\Delta p = 1$	from 1 to 2	120	480	960
Flow rate NI/min at 6 bar on free exhaust	from 2 to 3	220	1100	1930

Weight *see table*


Operational characteristic

Fluid

Filtered air

Max working pressure

10 bar

Operating Temperature

Min.
-5°CMax.
+70°C

Quick exhaust valve in line - M5 - M7 - G1/8"

Ordering code

6.02.1.C.L

CONNECTION (IN)

M5 = M5

03 = tube Ø3

04 = tube Ø4

06 = tube Ø6

CONNECTION (OUT)


M5 = M5

M7 = M7

18 = G1/8"

04 = tube Ø4

06 = tube Ø6

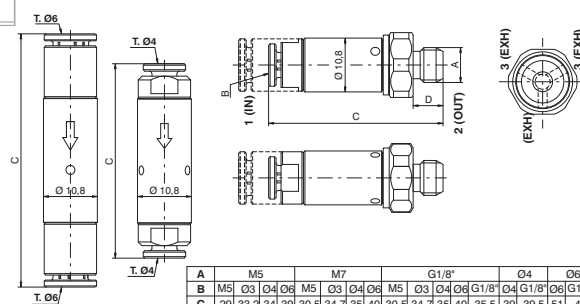

A	M5	M7	G1/8"	Ø4	Ø6
B	29	33	34	39	40
C	29	33	34	39	40
D	4.5	6	17	20	18
Weight (gr.)	90	110	90	110	110
Flow rate NI/min at 6 bar with $\Delta p = 1$ (from 1 to 2)	240	350	240	350	350
Flow rate NI/min at 6 bar on free exhaust (from 2 to 3)					

Weight *see table*


Operational characteristic

Fluid

Filtered air

Max working pressure

10 bar

Operating Temperature

Min.
-5°CMax.
+70°C

Exhaust flow control - M5 - G1/8" - G1/4" - G1/2"

Ordering code

6.03.1


CONNECTION

05 = M5

18 = G 1/8"

14 = G 1/4"

12 = G 1/2"



G	M5	1/8"	1/4"	1/2"
B	21	18	22	39
E	9	13	16	25
Weight gr.	10	18	32	155

Weight *see table*


Operational characteristic

Fluid

Filtered air

Max working pressure

10 bar

Operating Temperature

Min.
-5°CMax.
+70°C