
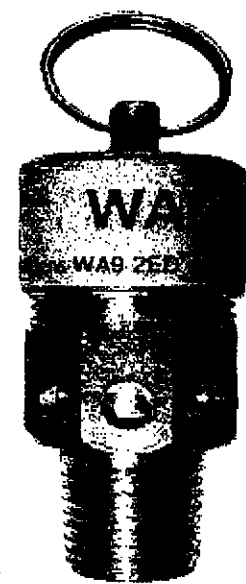


Wade SERIES 6000

**SAFETY RELIEF VALVE ATMOSPHERIC DISCHARGE
COMPLETE WITH EASING GEAR**

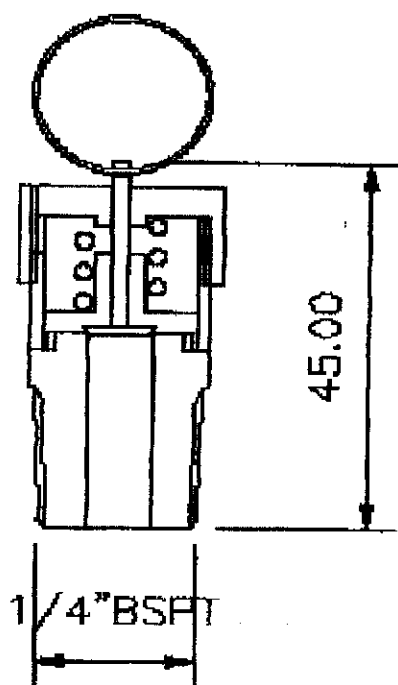

SPECIAL APPLICATION

Fitted with a silicone rubber seat this valve is used extensively on small Dental and Hospital Sterilizers.

FEATURES

- * SOFT VALVE WASHER FOR 'BUBBLE TIGHT' SEAL
- * HIGH PERFORMANCE
- * PRESSURE RANGE 1.8 barG TO 12.5 barG
- * ATMOSPHERIC DISCHARGE
- * SIZE RANGE: 1/4 BSP TAPER
- * VALVE WASHERS TO SUIT AIR & INERT GASES
- * BRASS CONSTRUCTION WITH ST.ST. SPRINGS

SPECIFICATION

The Series 6000 is a High Lift Safety Relief Valve with atmospheric discharge suitable for air and inert gas applications.

The flow is de-rated and measured in accordance with BS6759 Part 2: 1984

The valve re-seats by minus 10% of set pressure.

MAXIMUM SET PRESSURE	: 12.5 bar
MAXIMUM TEMPERATURE	: 140 deg C
MINIMUM TEMPERATURE	: -15 deg C

Valves for higher pressure ratings are available.
SAFETY VALVES ARE PED APPROVED AND CE MARKED



CAPACITIES - AIR at 15 deg C in Std. Litres/sec at 10% overpressure

BarG	1.8	2.0	3.0	4.0	5.0	6.0	7.0	8.0	9.0	10.0	11.0	12.0	12.5
1/4"	13	15	19	29	36	43	51	58	67	75	84	92	97

DELTA FLUID PRODUCTS LTD

DELTA ROAD, ST. HELENS WA9 2ED

Tel: 01744 451616 Fax: 01744 26791

E-mail: enquiry@deltafluidproducts.com