SMALL SIZE HORIZONTAL
PAINTED - GALVANIZED


DIRECTIVE 2014/29/UE
OPERATING PRESSURE 11/16 bar
OPERATING TEMPERATURE -10 +120°C

MATERIAL
Carbon steel

FLUID CONTENT
Compressed air / Nitrogen (group 2)

FINISHING
RAL5015: External Ral 5015 blue paint (standard)
GALVANIZED: internal and external hot-dip galvanization

UPON REQUEST
1" couplings on heads

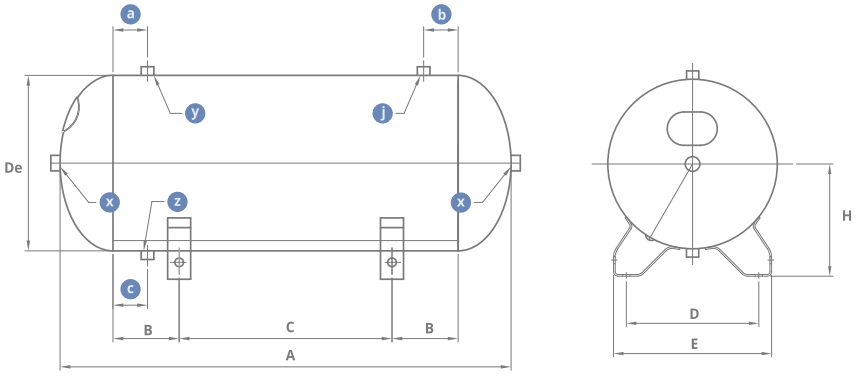



HORIZONTAL VESSELS WITH FIXED FEET

CODE	DIRECTIVE	CAPACITY	OPERATING PRESSURE	De	A	B	C	D	E	H	a	b	c	x	y	j	z	WEIGHT
		Lt	Bar	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	inch.	inch.	inch.	inch.	Kg
RAL 5015*																		
VEC01294	2014/29/UE	5	11	150	370	37,5	200	140	191	120	-	-	137,5	1/2"	-	-	1/4"	6,5
VEC01249	2014/29/UE	10	11	169	506	85	240	172	205	115	-	60	50	1/2"	-	3/8"	3/8"	8
VEC01237	2014/29/UE	15	11	196	522	85	240	172	205	135	-	60	50	1/2"	-	3/8"	3/8"	9
VEC01250	2014/29/UE	24	11	240	592	95	260	180	235	165	-	60	50	1/2"	-	3/8"	3/8"	10
VEC01251	2014/29/UE	50	11	305	784	100	400	236	285	203	60	60	60	1/2"	1/2"	1/2"	3/8"	19
VEC01715	2014/29/UE	24	16	240	592	95	260	180	235	165	-	60	50	1/2"	-	3/8"	3/8"	13
VEC02313	2014/29/UE	50	15	305	784	100	400	236	285	203	60	60	60	1/2"	1/2"	1/2"	3/8"	23
GALVANIZED																		
VEC03220	2014/29/UE	10	11	169	506	85	240	172	205	115	-	60	50	1"	-	3/8"	3/8"	8
VEC04702	2014/29/UE	15	11	196	522	85	240	172	205	135	-	60	50	1"	-	3/8"	3/8"	9
VEC03019	2014/29/UE	24	11	240	592	95	260	180	235	165	-	60	50	1"	-	3/8"	3/8"	10
VEC02779	2014/29/UE	50	11	305	784	100	400	236	285	203	60	60	60	1"	1/2"	1/2"	3/8"	19

Baglioni S.p.A. reserves the right to amend the information contained in this brochure at any time and with no prior notice